



2.92 mm Coaxial DC Block, 5 MHz to 40 GHz

Description:

Model SCB-050-KFKM-U7 is a coaxial DC block that prevents the flow of DC current in the frequency range of 5 MHz to 40 GHz. The DC block has a typical insertion loss of .5 dB, a nominal return loss of 15 dB, and a characteristic impedance of 50 ohms, respectively. It is manufactured with 2.92 mm male and female connectors for convenient circuit insertion. The breakdown voltage is +50 Volts.



Features:

- Broad Band Coverage
- High Return Loss
- Low Cost

Applications:

- Test Lab
- Instrumentations
- System Integration

Electrical Specifications:


Parameter	Minimum	Typical	Maximum
Frequency	5 MHz		40 GHz
Insertion Loss		.5 dB	
Return Loss		17 dB	
Breakdown Voltage			50 V
Impedance		50 Ω	
Specification Temperature		+25 °C	
Operating Temperature	-40 °C		+85 °C

Mechanical Specifications:


Port	Connector
Connector 1	2.92 mm Female
Output Port	2.92 mm Male
Material	Stainless Steel
Finish	Passivated
Length	.6"
Outline	CB-K-050-SR1

2.92 mm Coaxial DC Block, 5 MHz to 40 GHz

Typical Performance vs Frequency

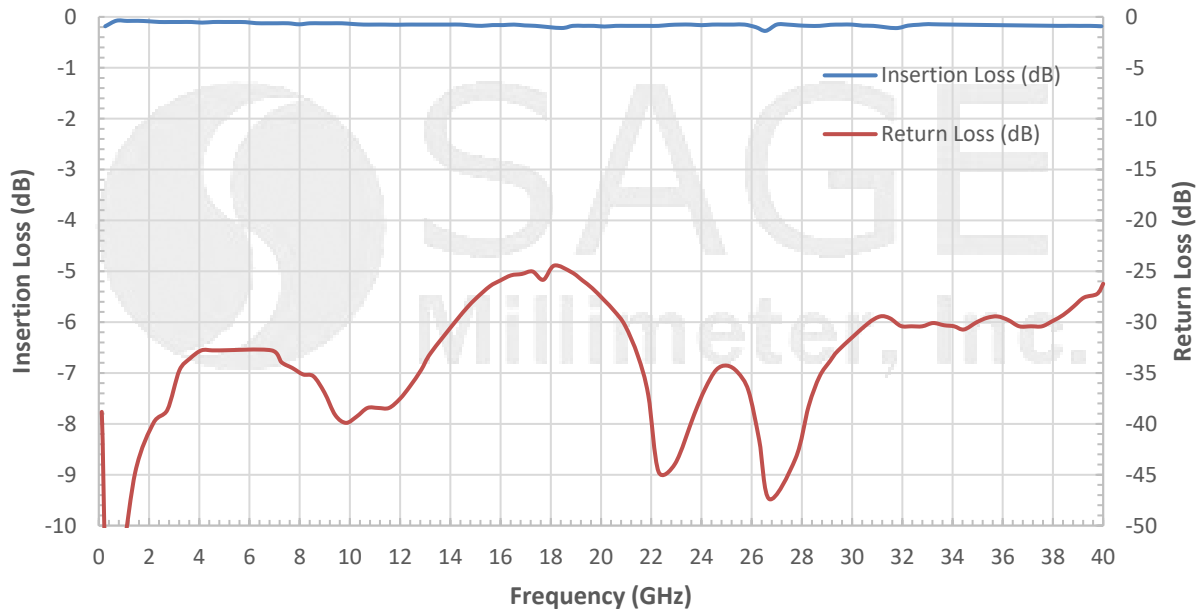

Mechanical Outline: (Unless otherwise specified, all dimensions are in inches [millimeters])

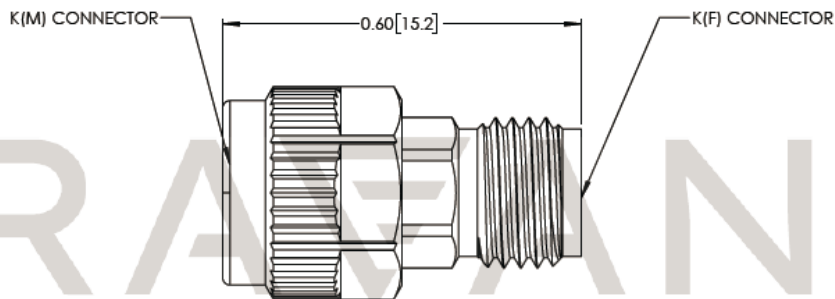

Note:

- All data presented is collected from a sample lot. Actual data may vary unit to unit.
- All testing was performed under +25 °C case temperature.
- Eravant reserves the right to change the information presented without notice.

Caution:

- Proper torque, 8.0 ± 0.15 inch-pounds (0.90 ± 0.02 Nm), should be applied. **Eravant torque wrench, model SCH-08008-U3, is highly recommended.**

www.eravant.com | 501 Amapola Ave., Torrance, CA 90501
 Phone: 424-757-0168 | Fax: 424-757-0188 | Email: support@eravant.com