

## Radar Target Simulator, Direct Reading, 81 to 86 GHz

### Description:

**Model STR-843-12-D1** is a radar doppler simulator that operates at 83.5 GHz with a bandwidth of  $\pm 2.5$  GHz and a WR-12 waveguide input/output. The simulator utilizes a single-sideband-modulator to modulate the incoming signal transmitted by the radar under test and sends back either a higher or lower band signal through a diplexer. The frequency-shifted signal is transmitted back to the radar under test as a Doppler signal. Target characteristics are adjusted by changing the I and Q channel frequency and phase. The routing attenuation is adjusted by the direct reading attenuator.



### Features:

- Single Sideband Output
- Simulated Target Speed and Size Adjustable
- Simulated Target Moving Direction Switchable
- Instrumentation Grade

### Applications:

- Doppler Target Simulations
- Radar System Testing

### Electrical Specifications:

Parameter	Minimum	Typical	Maximum
Center Frequency		83.5 GHz	
RF Bandwidth		$\pm 2.5$ GHz	
Carrier Rejection		30 dB	
Image Rejection		20 dB	
Routing Loss Range		25 to 125 dB	
I/Q Frequency Range	DC		250 MHz
I/Q Voltage		$\pm 10$ V <sub>p-p</sub>	$\pm 12$ V <sub>p-p</sub>
I/Q Current		$\pm 2.5$ mA	$\pm 5$ mA
I/Q Phase Error		$\pm 5^\circ$	
Specification Temperature		+25 °C	
Operating Temperature	0 °C		+50 °C

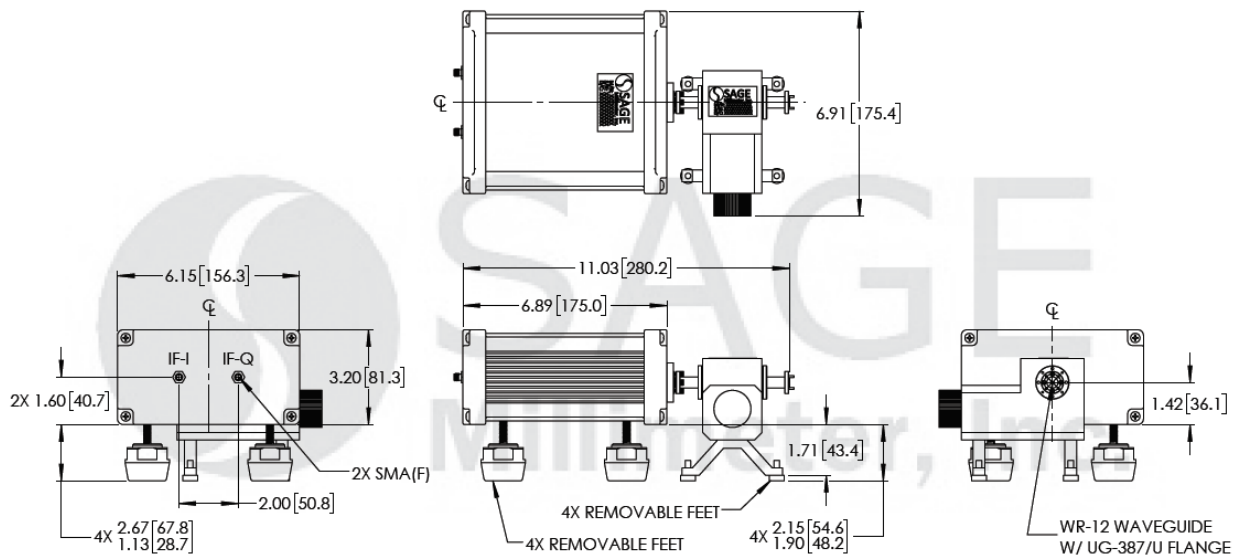
### Mechanical Specifications:

Item	Specification
RF Port	WR-12 Waveguide with UG-387/U Flange
I/Q Ports	SMA(F)
Size	6.91" (W) x 11.03" (L) x 5.10" (H)
Case Finish	Black Anodized
Outline	TR-ED



## Radar Target Simulator, Direct Reading, 81 to 86 GHz

**Mechanical Outline:** (Unless otherwise specified, all dimensions are in inches[millimeters])

**Note:**

- Eravant reserves the right to change the information presented without notice.
- Models with different operation frequencies are available under a different model numbers.
- A 83.5 GHz Radar Target Simulator with a **level setting attenuator**, instead of a direct reading attenuator, is available as model **STR-843-12-L1**.

**Caution:**

- Exceeding absolute maximum ratings of the device will damage the device.
- Proper torque,  $8.0 \pm 0.15$  inch-pounds ( $0.92 \pm 0.05$  Nm), should be applied. **Eravant torque wrench, model SCH-08008-S1, is highly recommended.**
- Any foreign objects in the waveguide will cause performance degradation and may damage the device.

