

EOLP-1325G-10-RX

1310nm SFP28 Single-Mode Transceiver, With DDM and Dual CDR
Duplex SFP28 Transceiver, RoHS Compliant

Features

- ◆ Operating data rate support 24.33Gbps and 25.78Gbps with CDR engaged mode
- ◆ Operating data rate support 9.95Gbps and 10.31Gbps with CDR bypassed mode
- ◆ 1310nm DFB-LD Transmitter
- ◆ Distance up to 10km
- ◆ Single 3.3V Power supply
- ◆ Duplex LC Connector Interface, Hot Pluggable
- ◆ Built-in dual CDR
- ◆ Compliant with MSA SFP+ Specification SFF-8402
- ◆ Power Dissipation < 1.2W(Standard)
- ◆ Power Dissipation < 1.5W(Industrial)
- ◆ Operating Case Temperature:
Standard: 0°C~+70°C
Industrial: -40°C~+85°C
- ◆ Safety Certification: TUV/UL/FDA*^{Note1}
- ◆ RoHS Compliant



Applications

- ◆ CPRI Option 10
- ◆ 25GbE
- ◆ 10GbE Optical Link

Ordering information

Part No.	Data Rate	Laser	Fiber Type	Distance	Temp.	CDR	DDMI
EOLP-1325G-10-R* ^{Note2}	24.33Gbps and 25.78Gbps	1310nm DFB	SMF	10km	0°C ~+70°C	Yes	Yes
EOLP-1325G-10-RI* ^{Note3}	24.33Gbps and 25.78Gbps	1310nm DFB	SMF	10km	-40°C ~+85°C	Yes	Yes

Note1: For the latest certification information, please check with Eoptolink.

Note2: Standard version

Note3: Industrial version

*The product image only for reference purpose.

Product Description

The EOLP-1325G-10-RX series single-mode transceiver is SFP28 module for duplex optical data communications support 24.33Gb/s and 25.78Gb/s with CDR engaged, while, 10G Ethernet optical data communication can be supported when CDR is bypassed. It is with the SFP+ 20-pin connector to allow hot plug capability. Digital diagnostic functions are available via an I²C. It has built-in clock and data recovery (CDR). This module is designed for single-mode fiber and operates at a nominal wavelength of 1310nm.

The transmitter section uses a 1310nm multiple quantum well DFB laser and is a class 1 laser compliant according to International Safety Standard IEC 60825. The receiver section uses an integrated InGaAs detector preamplifier (IDP) mounted in an optical header and a limiting post-amplifier IC.

Absolute Maximum Ratings*^{Note4}

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	T _s	-45	+100	°C
Supply Voltage	V _{cc}	-0.5	4.0	V
Operating Relative Humidity	RH	5	95	%

Note4: Exceeding any one of these values may destroy the device permanently.

Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit
Operating Case Temperature	T _c	Standard	0	70	°C
		Industrial	-40	85	°C
Power Supply Voltage	V _{cc}	3.135		3.465	V
Power Supply Current	I _{cc}	Standard		360	mA
		Industrial		455	mA

Performance Specifications – Electrical

Parameter	Symbol	Min.	Typ.	Max	Unit	Notes
Transmitter						
CML Inputs(Differential)	V _{in}	200		900	mVpp	AC coupled inputs
Input Impedance (Differential)	Z _{in}		100		ohms	Connected directly to TX pins



Tx_DISABLE Input Voltage – High		2		V _{cc} +0.3	V	
Tx_DISABLE Input Voltage – Low		-0.3		0.8	V	
Receiver						
CML Outputs (Differential)	V _{out}	300		1000	mV _{pp}	AC coupled outputs
Rx_LOS Output Voltage – High		2		V _{cc} +0.3	V	
Rx_LOS Output Voltage – Low		-0.3		0.8	V	

Optical and Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
9um Core Diameter SMF				10	km
Transmitter					
Centre Wavelength	λ_c	1295	1310	1325	nm
Spectral Width (-20dB)	$\Delta\lambda$			1	nm
Average Output Power@25.78Gb/s	P _{out}	-7		2	dBm
Extinction Ratio	ER	3			dB
Transmitter Dispersion Penalty	TDP			2.7	dB
Receiver					
Centre Wavelength	λ_c	1260	1310	1355	nm
Receiver Sensitivity(OMA)*Note5	R _{XOMA}			-12	dBm
Stressed Receiver Sensitivity(OMA)*Note5	R _{XSRs}			-9.5	dBm
Receiver Overload	P _{max}	2			dBm
Receiver Reflectance				-26	dB
LOS De-Assert	LOS _D			-17	dBm
LOS Assert	LOS _A	-30			dBm
LOS Hysteresis	HY	0.5			dB

Note5: Measured with data rate at 25.78Gb/s, BER less than 5E-5 with PRBS 2³¹-1.

SFP28 Transceiver Electrical Pad Layout

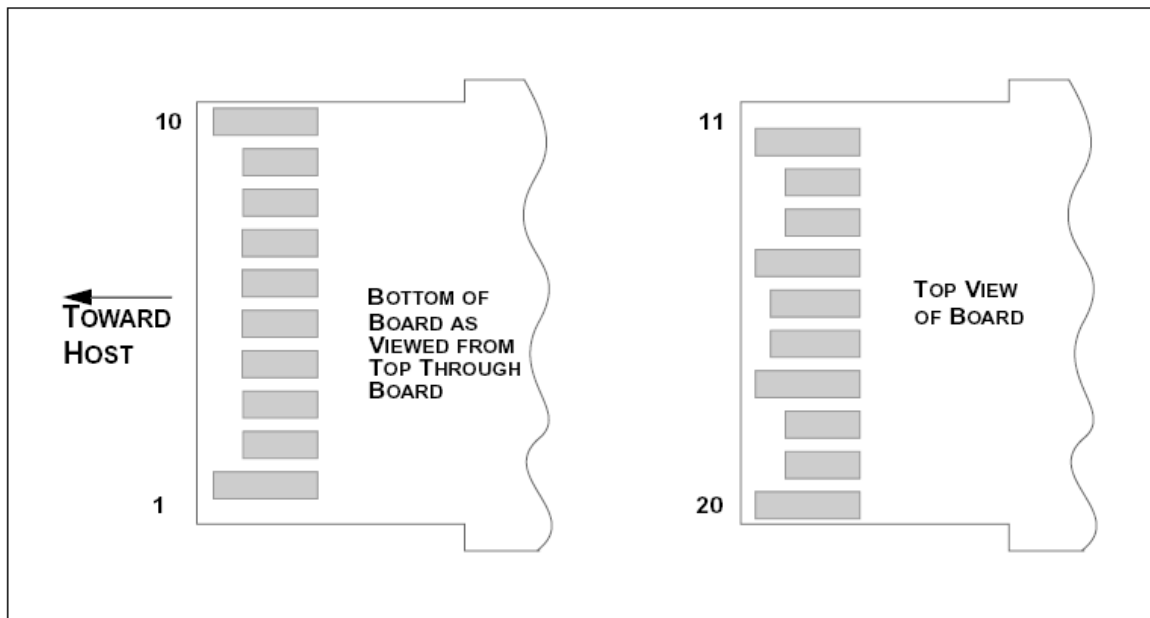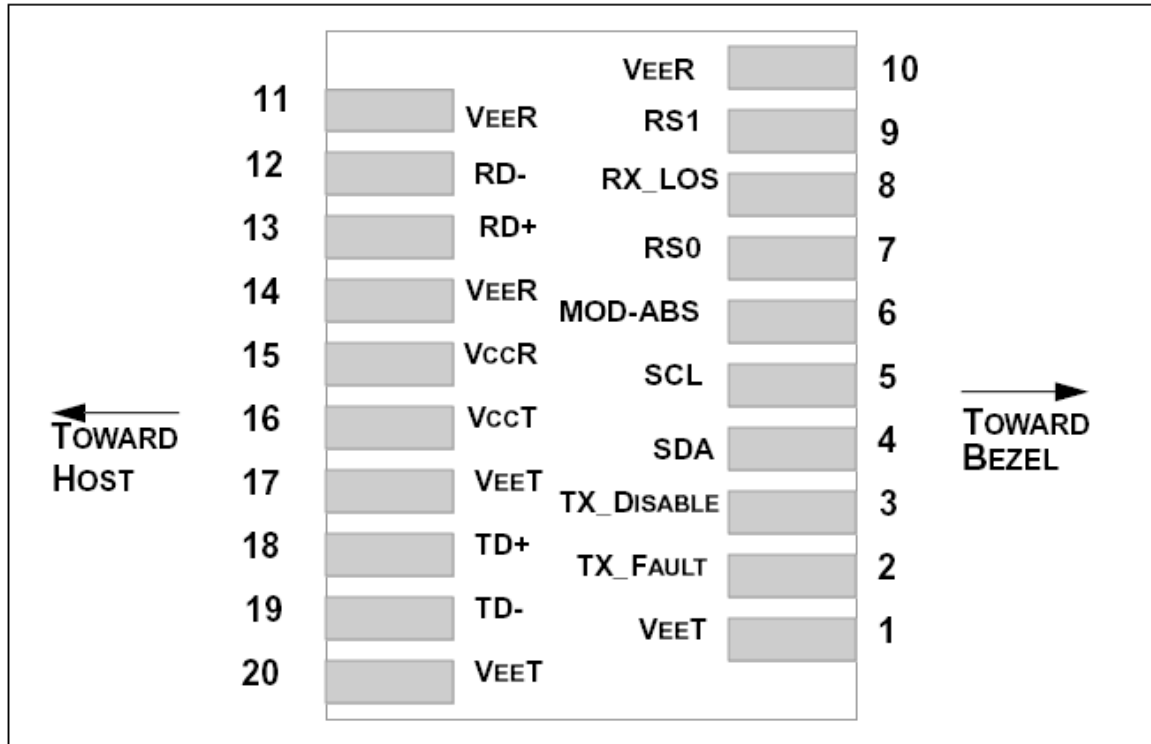

Pin Function Definitions

Pin Num.	Name	Function	Plug Seq.	Notes
1	VeeT	Transmitter Ground	1	Note 5
2	TX Fault	Transmitter Fault Indication	3	Note 1
3	TX Disable	Transmitter Disable	3	Note 2, Module disables on high or open
4	SDA	Module Definition 2	3	Data line for Serial ID.
5	SCL	Module Definition 1	3	Clock line for Serial ID.
6	MOD-ABS	Module Definition 0	3	Note 3
7	RS0	RX Rate Select (LVTTTL).	3	Rate Select 0, optionally controls SFP28 module receiver. This pin is pulled low to VeeT with a >30K resistor.
8	RX LOS	Loss of Signal	3	Note 4
9	RS1	TX Rate Select (LVTTTL).	1	Rate Select 1, optionally controls SFP28 module transmitter. This pin is pulled low to VeeT with a >30K resistor.
10	VeeR	Receiver Ground	1	Note 5
11	VeeR	Receiver Ground	1	Note 5
12	RD-	Inv. Received Data Out	3	Note 6
13	RD+	Received Data Out	3	Note 6
14	VeeR	Receiver Ground	1	Note 5
15	VccR	Receiver Power	2	3.3V ± 5%, Note 7
16	VccT	Transmitter Power	2	3.3V ± 5%, Note 7
17	VeeT	Transmitter Ground	1	Note 5
18	TD+	Transmit Data In	3	Note 8
19	TD-	Inv. Transmit Data In	3	Note 8
20	VeeT	Transmitter Ground	1	Note 5

Notes:

1) TX Fault is an open collector/drain output, which should be pulled up with a 4.7K – 10KΩ resistor on the host board. Pull up voltage between 2.4V and $V_{ccT/R} + 0.3V$. When high, output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to < 0.4V.

2) TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7K~10 K Ω resistor. Its states are:

Low (-0.3 – 0.8V): Transmitter on

(>0.8, < 2.0V): Undefined

High (2.0 – $V_{ccT/R} + 0.3V$): Transmitter Disabled

Open: Transmitter Disabled

3) Module Absent, connected to VeeT or VeeR in the module.

4) RX LOS (Loss of Signal) is an open collector/drain output, which should be pulled up with a 4.7K – 10KΩ resistor. Pull up voltage between 2.4V and $V_{ccT/R}+0.3V$. When high, this output indicates the received optical power is below the worst-case receiver sensitivity (as defined by the standard in use). Low indicates normal operation. In the low state, the output will be pulled to $< 0.4V$.

5) VeeR and VeeT may be internally connected within the SFP28 module.

6) RD-/+ : These are the differential receiver outputs. They are AC coupled 100Ω differential lines which should be terminated with 100Ω (differential) at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board. The voltage swing on these lines will be between 150 mV-500mV single-ended when properly terminated.


7) VccR and VccT are the receiver and transmitter power supplies. They are defined as 3.3V $\pm 5\%$ at the SFP+ connector pin. Maximum supply current is 455mA. Inductors with DC resistance of less than 1 ohm should be used in order to maintain the required voltage at the SFP28 input pin with 3.3V supply voltage. When the recommended supply-filtering network is used, hot plugging of the SFP28 transceiver module will result in an inrush current of no more than 30mA greater than the steady state value. VccR and VccT may be internally connected within the SFP28 transceiver module.

8) TD-/+ : These are the differential transmitter inputs. They are AC-coupled, differential lines with 100Ω differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board. The inputs will accept swings of 90mV-800mV single-ended, though it is recommended that values between 100mV-450mV single-ended be used for best EMI performance.

EEPROM

The serial interface uses the 2-wire serial CMOS EEPROM protocol. When the serial protocol is activated, the host generates the serial clock signal (SCL). The positive edge clocks data into those segments of the EEPROM that are not writing protected within the SFP28 transceiver. The negative edge clocks data from the SFP28 transceiver. The serial data signal (SDA) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially.

The Module provides diagnostic information about the present operating conditions. The transceiver generates this diagnostic data by digitization of internal analog signals. Calibration and alarm/warning threshold data is written during device manufacture. Received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring all are implemented. If the module is defined as external calibrated, the diagnostic data are raw A/D values and must be converted to real world units using calibration constants stored in EEPROM locations 56 – 95 at wire serial bus address A2H. The digital diagnostic memory map specific data field define as following .For detail EEPROM information, please refer to the related

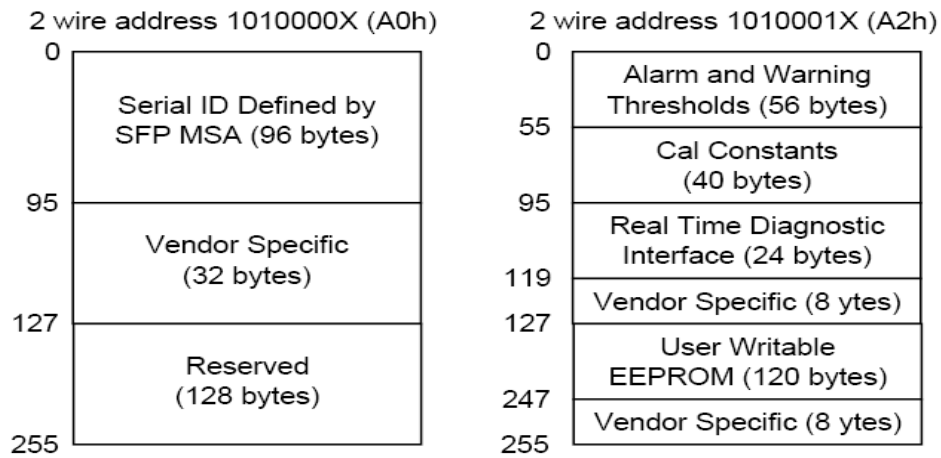

EEPROM Serial ID Memory Contents (2-Wire Address A0h)

EEPROM Address		A0h		Version	V1.0
Data Addr	Field Size (Byte)	Name Of filed	Description of field	Coded value	Hex
BASE ID FIELDS					
0	1	Identifier	Type of serial transceiver	SFP28	03
1	1	Ext.Identifier	Extended identifier of Type of serial transceiver	MOD4	04
2	1	Connector	Code for connector type	LC	07
3	8	Transceiver	10G Ethernet Compliance Codes & Infiniband Compliance Codes		00
4			Part of SONET Compliance Codes		00
5			SONET Compliance Codes		00
6			Ethernet Compliance Codes		00
7			Fiber Channel link length & part of Fibre Channel technology		00
8			Part of Fiber Channel transmitter technology		00
9			Fiber Channel Transmission media		00
10			Fiber Channel speed		00
11	1	Encoding	Code for high speed serial	64B/66B	06

			encoding algorithm		
12	1	BR, Nominal	Nominal signalling rate, units of 100MBd.(see details for rates > 25.0Gb/s)	25.78Gbps	FF
13	1	Rate Identifier	Type of rate select functionality		00
14	1	Length(SMF,km)	Link length supported for single mode fiber, units of km	10(km)	0A
15	1	Length (SMF)	Link length supported for single mode fiber, units of 100 m	100(100m)	64
16	1	Length (50um)	Link length supported for 50 um OM2 fiber, units of 10 m		00
17	1	Length (62.5um)	Link length supported for 62.5 um OM1 fiber, units of 10 m		00
18	1	Length (OM4 or copper cable)	Link length supported for 50um OM4 fiber, units of 10m. Alternatively copper or direct attach cable, units of m		00
19	1	Length (OM3)	Link length supported for 50 um OM3 fiber, units of 10 m		00
20	16	Vendor name	Vendor name (ASCII)	E	45
21				o	6F
22				p	70
23				t	74
24				o	6F
25				l	6C
26				i	69
27				n	6E
28				k	6B
29				<space>	20
30				<space>	20
31				<space>	20
32				<space>	20
33				<space>	20
34				<space>	20

35				<space>	20
36	1	Transceiver	Code for electronic or optical compatibility	25GBASE-LR	03
37	3	Vendor OUI	SFP vendor IEEE company ID		00
38				00	
39				00	
40	16	Vendor PN	Part number provided by vendor (ASCII)	E	45
41				O	4F
42				L	4C
43				P	50
44				-	2D
45				1	31
46				3	33
47				2	32
48				5	35
49				G	47
50				-	2D
51				1	31
52				0	30
53				-	2D
54				R	52
55					<space> / I
56	4	Vendor rev	Revision level for part number provided by vendor (ASCII)	1	31
57				.	2E
58				0	30
59				<space>	20
60	2	Wavelength	Laser Wavelength	1310nm	05
61				1E	
62	1	Reserved			00
63	1	CC_BASE	Check code for Base ID Fields (addresses 0 to 62)		87/B0
64	2	Options	Indicates which optional transceiver signals are implemented	CDR indicator;power Level Declaration;power level 2	0A
65				RATE_SELECT, TX_DISABLE, TX_FAULT signal,Rx_LOS	3A
66	1	BR, max	Nominal bit rate per channel,units of 250 Mbps. Complements Byte 12	25.78Gbps	67

67	1	BR, min	Lower bit rate margin, units of %(see details for rates > 25.0Gb/s)		00
68	16	Vendor SN	Serial number provided by vendor (ASCII)	x	xx
69				x	xx
70				x	xx
71				x	xx
72				x	xx
73				x	xx
74				x	xx
75				x	xx
76				x	xx
77				x	xx
78				<space>	20
79				<space>	20
80				<space>	20
81				<space>	20
82				<space>	20
83				<space>	20
84	8	Date code	Vendor's manufacturing date code	Year	x
85				Year	x
86				Month	x
87				Month	x
88				Day	x
89				Day	x
90				<Space>	20
91				<Space>	20
92	1	Diagnostic Monitoring Type	Type of diagnostic monitoring is implemented	DD Implemented; Internally Calibrated; Average Power	68
93	1	Enhanced Options	Optional enhanced features are implemented	Optional Alarm/warning Flags Implemented,Optional soft TX_DISABLE,Optional soft TX_FAULT monitoring,Optional soft RX_LOS,Optional soft RATE_SELECT monitoring	F8
94	1	SFF-8472 Compliance	Revision of SFF-8472 the transceiver complies with	Rev 12.0 of SFF-8472.	08
95	1	CC_EXT	Check code for the	Note 5	xx

			Extended ID Fields (addresses 64 to 94)		
Note 5: The check code shall be the low order 8 bits of the sum of the contents of all the bytes from byte 64 to byte 94, inclusive.					


Operation about Retimer/CDR Rate Select Logic

The EOLP-1325G-10-RX supports high data rates 24.33G/25.78G(CPRI options 10 /25GbE) and Low data rates 9.95G/10.31G(10GbE-LW/LR). For more details, please contact Eoptolink.

Logic OR of RS0 Pin and Bit110.3 of A2H	Logic OR of RS1 Pin and Bit118.3 of A2H	RX Data Rate	TX Data Rate	Status of RX CDR	Status of TX CDR
High/1	High/1	24.33G/25.78 G	24.33G/25.78 G	CDR Engaged	CDR Engaged
High/1	Low/0	24.33G/25.78 G	9.95G/10.31G	CDR Engaged	CDR Bypassed
Low/0	High/1	9.95G/10.31G	24.33G/25.78 G	CDR Bypassed	CDR Engaged
Low/0	Low/0	9.95G/10.31G	9.95G/10.31G	CDR Bypassed	CDR Bypassed

Mechanical Specifications*

For detail mechanical information, please refer to the related document of SFF-8432.

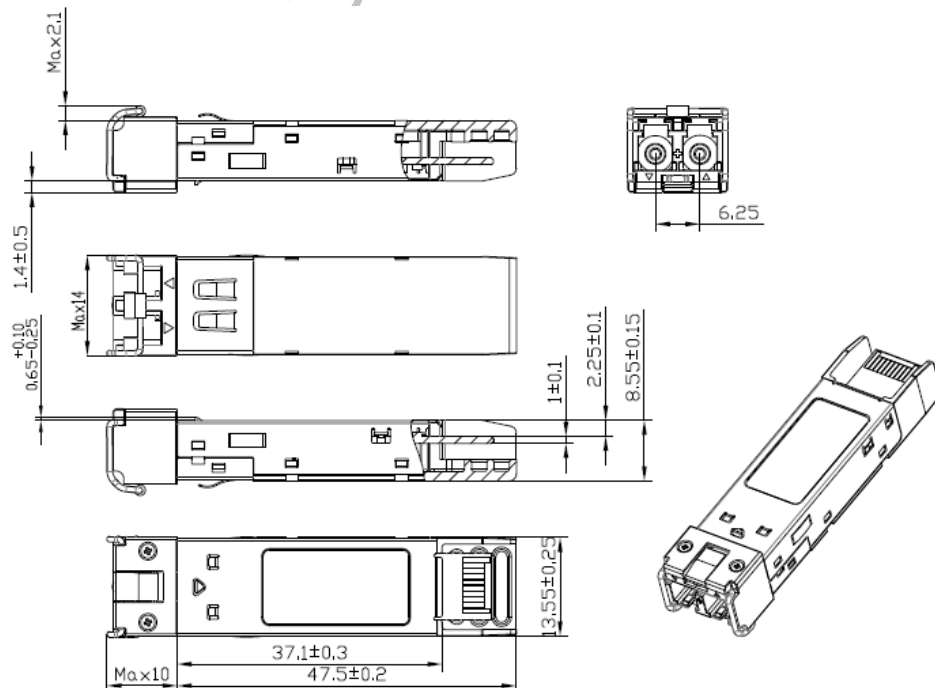

Unremarked tolerances ±0.2mm

*This 2D drawing only for reference, please check with Eoptolink before ordering.

Eye Safety

This single-mode transceiver is a Class 1 laser product. It complies with IEC-60825 and FDA 21 CFR 1040.10 and 1040.11. The transceiver must be operated within the specified temperature and voltage limits. The optical ports of the module shall be terminated with an optical connector or with a dust plug.

Obtaining Document

You can visit our website: <http://www.eoptolink.com>

Or contact Eoptolink Technology Inc., Ltd. Listed at the end of the documentation to get the latest documents.

Revision History

Revision	Initiate	Review	Approve	Revision History	Release Date
V1.a	Airon/ Yi.Wan/ Angela	Picard/Kelly/ Young/Roty		Preliminary	Aug 04, 2016
V1.b	Roty/ William	Airon/Picard		Update the mechanical structure	Dec 28, 2016
V1.c	Airon	Picard/Roty/ Kelly/Yi.Wan/ Dawn		Add/update information about Industrial module	Feb 20, 2017
V1.d	Roty	Picard/Airon/ Kelly		Correct the industrial temperature	Mar 17, 2017
V1.e	Roty	Chao.Wang		Update the module picture and Change the industrial Laser type, power dissipation, Update the 2D drawing, the address and the contact information, update A0h	Sep 19, 2017
V1.f	Roty	Airon/Marvin/ Yiwan		Update the Optical and Electrical Characteristics compliant with IEEE P802.3cc-2017, add the RATE_SELECT in EEPROM	Dec 06, 2017
V1.g	Roty	Airon/Marvin/ Nico/Kelly		Add RxOMA, RxSRS compliant with IEEE P802.3cc/D3.0, Update the 2D drawing.	Jun 05, 2018
V2.a	Roty	Airon/Marvin/ Nico/Kelly/		Add Rate Select operation, Update the Optical	Jul 28, 2018

		John/Flagon/ Xavier		characteristics based on IEEE Std 802.3cc-2017	
V2.b	Angela	Kelly/ Yiwei.Cheng		Updated the regulatory compliance information.	Dec 18, 2018

Notice:

Eoptolink reserves the right to make changes to or discontinue any optical link product or service identified in this publication, without notice, in order to improve design and/or performance. Applications that are described herein for any of the optical link products are for illustrative purposes only. Eoptolink makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Contact:

Add: No.127 West Wulian Street, Gongxing Town, Shuangliu district, Chengdu City, Sichuan, China.

Tel: (+86) 028-67087999

Fax: (+86) 28-67087979-8010

Postal: 610213

E-mail: sales@eoptolink.com

<http://www.eoptolink.com>