

# LD-515-30SG

- Direct Emitting Green Laser Diode
- 515 nm, 30 mW
- Single Transverse Mode
- Structure: GaN





#### Description

**LD-515-30SG** is a direct emitting, **GaN based**, 515nm green laser diode in TO38 package **without photodiode**. It offers single transverse mode emission and >100 Mhz modulation bandwidth. It is an efficient radiation source for many applications like **laser projection**, holography, metrology, biomedical application...

# **Maximum Ratings**


Parameter	Symbol	Val	Unit	
Farameter		Min.	Max.	Unit
Operating Current	I <sub>F</sub>		180	mA
Reverse Voltage	V <sub>R</sub>		2	V
Operating Temperature	$T_{CASE}$	+ 20	+ 60	°C
Storage Temperature	$T_{\rm STG}$	- 40	+ 85	°C
Soldering Temperature	$T_{\text{SOLDER}}$		260	°C
Junction Temperature	$T_{J}$		150	°C


#### Laser Characteristics (T<sub>CASE</sub> = 25°C, P<sub>O</sub> = 30 mW)


Deremeter	Symbol	Values			11
Parameter		Min.	Тур.	Max.	Unit
Emission Wavelength	$\lambda_{peak}$	510	515	530	nm
Optical Output Power	Po	30			mW
Spectral Width	$\Delta \lambda$		2		nm
Treshold Current	I <sub>th</sub>		50	75	mA
Operating Current	I <sub>F</sub>		120	140	mA
Operating Voltage	$V_{F}$		6.7	8.0	V
Beam Divergence (FWHM)	$\Theta_{II} \times \Theta_{\perp}$	4x16	7x22	11x25	deg
Polarization	$P_{ m GR}$	20:1			
Modulation Frequency	f		>100		MHz



# Performance Characteristics

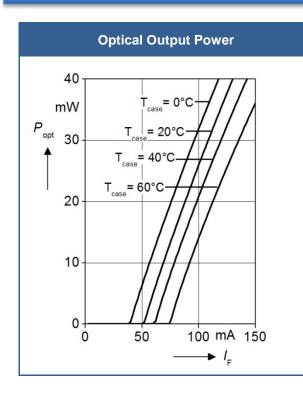


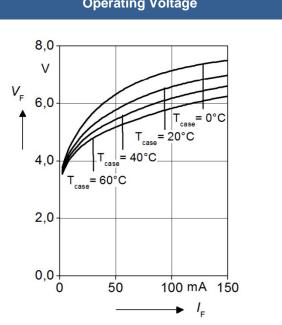

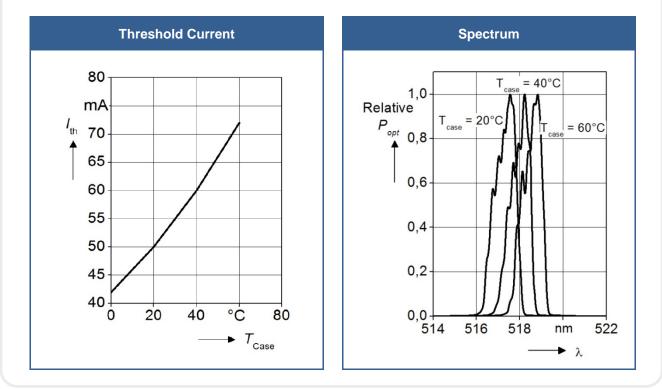

**Operating Voltage** 



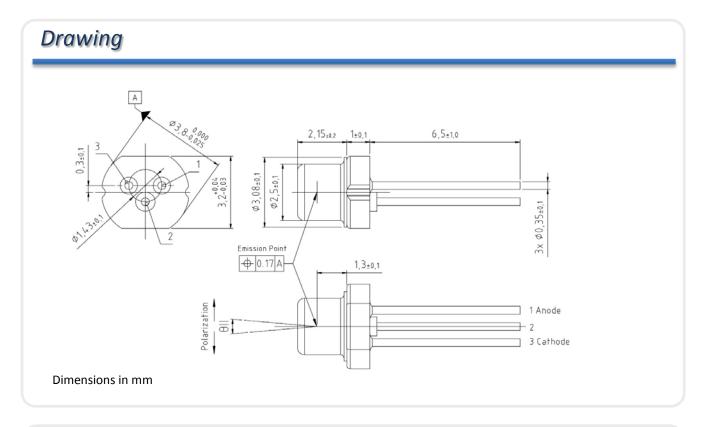

# **Electrical Connection**

Lead	Description		ATTENTION
Pin 1	LD Anode		ATTENTION OBSERVE PRECAUTIONS FOR HANDLING ELECTROSTATIC SENSITIVE DEVICE
Pin 2	Case		
Pin 3	LD Cathode	°2	

# **Mounting Instruction**

In order to maintain lifetime and stability of the laser diode it is essential to provide efficient heat management. Heat dissipation is possible through the base plate only. For long time stable operation proper contact between laser diode base plate and heat sink is mandatory

# Safety Advice

This laser diode emits highly concentrated visible light which can be **hazardous to the human eye**. This diode is classified as **Class 3B laser product** according to **IEC 60825-1**. Actual laser light emitted and precautions necessary strongly depend on mode of operation.

© All Rights Reserved

The above specifications are for reference purpose only and subjected to change without prior notice