

### IMP-1550-10-PM



#### **DFVICE**

### 1550 nm, 10 GHz Intensity Modulator w/PM Output

The Optilab IMP-1550-10-PM is a 10 GHz Intensity Modulator that is manufactured with Annealed Proton Exchange (APE) process, it features a zero-chirp design and Polarization Maintaining (PM) fiber output. IMP-1550-10-PM features 10 GHz E/O bandwidth, a highly linear transfer function and excellent extinction ratio. Applications include digital transmission up to 12.5 Gb/s, analog RFoF transmission to 10 GHz, optical pulse generation, modelocked fiber laser and microwave optical link. The IMP-1550-10-PM is compatible with a wide variety of modulator drivers, and a separate bias port allows the modulator to operate at specific points of the transfer function. The IMP-1550-10-PM Modulator is designed for external modulation of 1550 nm laser up to 10 GHz or 12.5 Gb/s. It is also applicable for pulse generation for Master Oscillator Power Amplifier (MOPA) configuration. Due to proprietary APE technology, IMP-1550-10-PM can handle up to 100mW input optical power. It has a wide operating temperature tolerance ranging from -30°C to +70°C. Contact Optilab for more information.

#### **OVERVIEW**

#### **FFATURES**


- PM fiber output
- High input power
- Zero chirp design
- - Internal PD option
- 1520 -1580 nm operating wavelength
- High Extinction Ratio (HER) Available
- Temperature range of -30°C to 70°C

#### **USE IN**

- RF over fiber
- Pulse generation
- MOPA

- Analog modulation up to 10 GHz
- Active mode locked laser
- Satellite Link

#### **FUNCTIONAL DIAGRAM**

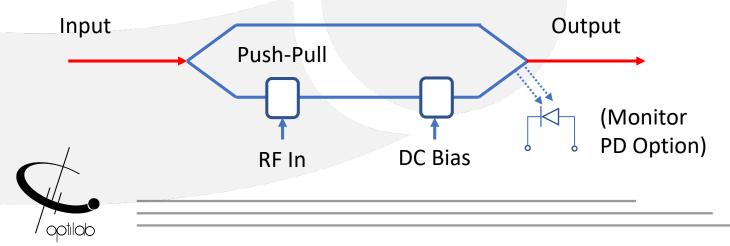



# //\_\_\_ IMP-1550-10-PM

#### **SPECIFICATIONS**

**GENERAL** 

Maximum Input Power	100 mW		
Operating Wavelength	1550 ± 30 nm		
Chirp Value	≤ 0.2		
Insertion Loss	4.5 dB typ., 5.0 dB max.		
Extinction Ratio	≥ 20 dB standard. ≥ 30 dB HER version		
Optical Return Loss	≤ -45 dB		
S21 3 dB Bandwidth	7 GHz min., 10 GHz typ.		
Polarization Extinction Ratio	17 dB min., 20 dB typ.		
S11 Return Loss ≤ -7 dB up to 10 GHz			
RF Vπ (@ 1 GHz)	6 V typ. , 7 V max.		
RF Input Power	26 dBm max.		
Impedance (RF Port)	50 Ω typ.		
Bias Vπ (@ 1 kHz)	6.8V typ., 7.5V max.		
Impedance (Bias Port)	1 MΩ min.		
Internal PD Responsivity	> 10 mA/W		


**MECHANICAL** 


Operating Temperature	-30 °C to +70 °C		
Storage Temperature	-50 °C to +80 °C		
Operating Humidity	0% to 90% Relative Humidity		
Input/Output Fiber Type	Panda PM15-U40D, 400um buffer		
Input Connector	PM FC/APC, slow axis aligned to Key		
Output Connector	PM FC/APC, slow axis aligned to Key		
Crystal Orientation	X-cut, Y-propagating		
Waveguide Process	Annealed Proton Exchange (APE)		
RF Port Connector	2.92 mm Female (K Compatible)		
Cabling	900 um loose tubing		
Dimensions 96 mm x 14 mm x 8.5 mm			






#### SAMPLE S21 AND S11 BANDWIDTH

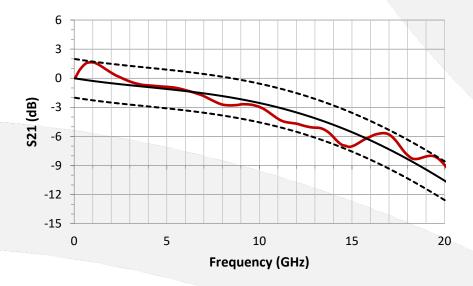

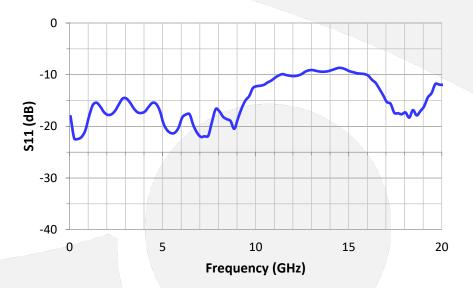






optilab


### IMP-1550-10-PM

#### MECHANICAL DRAWING

#### 1. IMP-1550-10-PM-PD Housing, w/Monitor PD

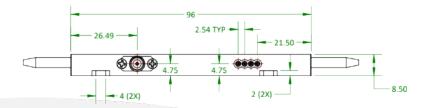


#### FRONT VIEW

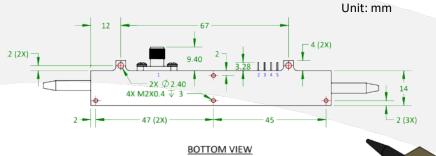

PIN#	Description
1	RF Input
2	GND
3	Bias
4	PD-Anode
5	PD-Cathode

#### 2. IMP-1550-10-PM Housing, No Monitor PD

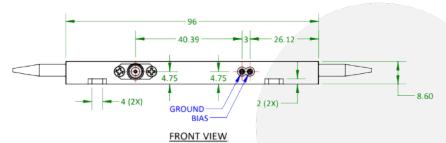

Unit: mm

2 (2X)	12 67 9.40 9.40 4x ∅ 2.40 4x ∅ M2X0.4 ↓ 3	4 (2X)	2
2 -	47 (2X) BOTTOM V	45 VIEW	2 (3X)

PIN#	Symbol
G	GND
В	BIAS



## \_\_ IMP-1550-10-PM

ORDERING OPTIONS

IMP-1550-10-PM-XX

XX PD: Monitor PD Option

Available Automatic Bias Controller

BCB-4



The Optilab BCB-4 is a compact automatic bias controller designed for biasing MZI Intensity modulator

Available Laser Source DFB Laser Source



The Optilab DFB-1550-PM-50 laser has polarization maintaining high output power up to 50mW

