

MLL-H-760/1~3000mW



**LOW NOISE RED DIODE LASER AT 760nm**

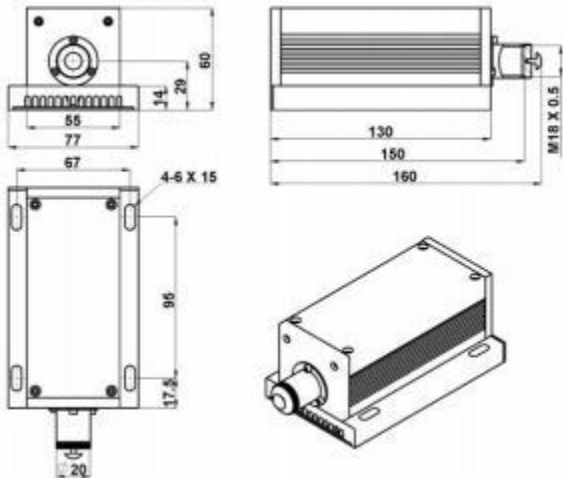

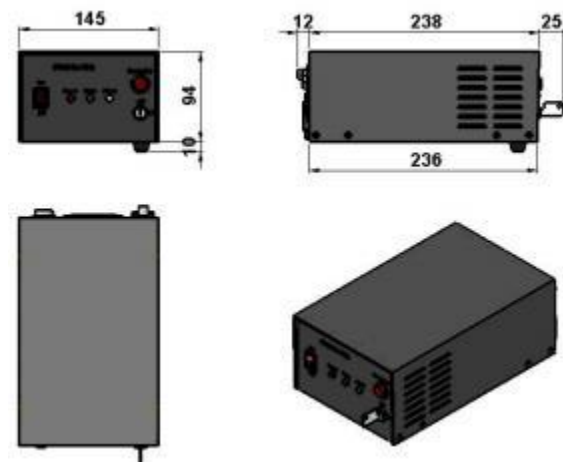
Low noise red diode laser at 760nm is made features of ultra compact, long lifetime, cost-effectiveness and easy operating, which is widely used in measurement, spectrum analysis, etc.



SPECIFICATIONS

Wavelength (nm)	760±10	
Operating mode	CW	
Output power (mW)	>1, 100, 1000, 2000, ... , 3000	
Power stability (rms, over 4 hours)	<1%, <3%, <5%	
Transverse mode	Multimode	
Noise of amplitude(rms,20Hz~20MHz)	<1%	
Dimensions of beam at the aperture (mm)	~5×8	
Beam divergence, full angle (mrad)	<3. 0	
Warm-up time (minutes)	<5	
Beam height from base plate (mm)	29	
Operating temperature (°C)	10~35	
Power supply (100-240VAC)	PSU-H-LED	PSU-H-FDA
TTL / Analog modulation	TTL or Analog with 1Hz-1KHz 1KHz-10KHz, 10KHz-30KHz optional	
Expected lifetime (hours)	10000	
Warranty	1 year	



MxL-H-760	PSU-H-LED	PSU-H-FDA
 <p>160 (L) × 77(W) × 60 (H) mm<sup>3</sup>, 0.9kg</p>	 <p>277 (L) × 145(W) × 106(H) mm<sup>3</sup>, 2.3kg</p>	 <p>275 (L) × 145(W) × 104(H) mm<sup>3</sup>, 2.1kg</p>